

LED BOLLARD LIGHT
MODEL: OS BOL-1603 / OS BOL-1604
OS BOL-1603


OS BOL-1604

Specifications & Technical Data

- Body is Extruded From Aluminium
- Die Cast Aluminium Cap & Mounting Base
- Anodized High Purity Aluminium Louver
- Acrylic **Clear** Diffuser
- Electrostatic Polyester Powder Coated
- Lampholder of Ceramic (**E27**)
- Connecting Devices of Nylon 3 Way x 2.5mm²
- Sealed With Silicone Gasket
- Stainless Steel Screws
- Degree of Protection: **IP65**
- Type of Protection: Class 1
- Mounting Method: Surface Ground Mounted

Available Colour:

Black Texture

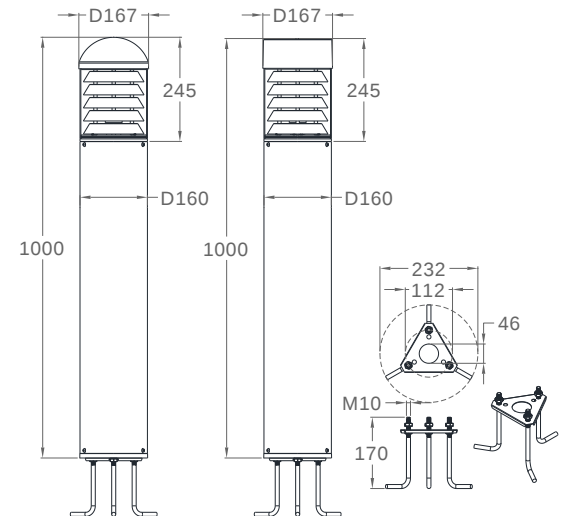

Model	Luminaires					Dimension	Current (A)	P.F. (λ)
	Cap	Louver	Lamp	Base	AC Input	(mm)	± 5 %	>
OS BOL-1603	Round	Anodized Aluminium	1 x 8W / 11W	E27	220-240V, 50/60Hz	As Shown	0.06 / 0.08	> 0.50
OS BOL-1604	Flat	Anodized Aluminium	1 x 8W / 11W	E27	220-240V, 50/60Hz	As Shown	0.06 / 0.08	> 0.50

Brand	Code	Luminous Flux (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED T-Stick 8W xxxK (RLDTC08**E7TH1)	850lm	8W	2700K / 6500K	≥ 80	≤ 6	220°	E27	0.06	> 0.5	220-240V, 50/60Hz	15000Hrs
TOSHIBA	LED T-Stick 11W xxxK (RLDTC11**E7TH1)	1150lm	11W	2700K / 6500K	≥ 80	≤ 6	220°	E27	0.08	> 0.5	220-240V, 50/60Hz	15000Hrs