

SOLARIS SERIES - SOLAR FLOOD LIGHT
MODEL: SLR FL01010


Specifications & Technical Data
Luminaires:

- ABS+UV Housing
- PC Reflector & Tempered Glass
- Mild Steel Mounting Bracket
- M12 Waterproof Connector & Cable
- High Efficiency Monocrystalline Solar Panel
- High Capacity LiFePO4 Battery (≥ 2000 Cycles)
- High Colour Rendering Index (CRI) ≥ 80 Ra

- Integrated Microwave Motion Sensor
- **Detection Range:** Up to **6 Meter**
- **Motion Detected:** Brightness Output is **100%**
- **Motion Stop:** Brightness Reduced to **20%** After **30 Seconds**

Areas of Application:

Landscape / Garden / Path / Courtyard
Suitable For General Outdoor Application
Not Recommended For Very Severe Conditions

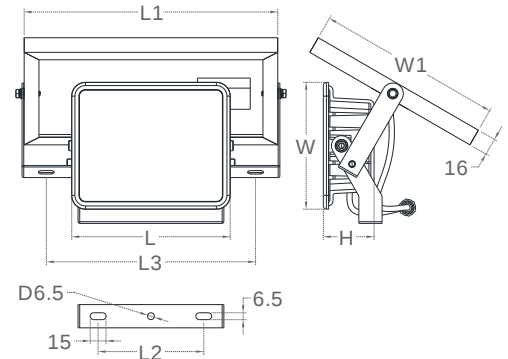

Model	Equivalent Power (W)	System Lumen (lm)	LED Power	CCT (K)	Monocrystalline Solar Panel	LiFePo4 Battery	Charge Time <i>(Peak Sun Hour)</i>	Duration <i>(Auto)</i>	Dimension (mm)						
									L	W	H	L1	W1	L2	L3
SLR FL01010	150W	1500lm	10	6500K	10W / 2A / 5V	3.2V / 12Ah	4 - 6 Hours	> 12 Hrs	220	170	53	350	235	150	260

Photometric Data
