

OASIS 05 SERIES RECESSED ROUND LED DOWNLIGHT

MODEL: OS 705

Made to Order



Specifications & Technical Data

Luminaires:


- Aluminium Alloy Rim & Housing
- Electrostatically Polyester Powder Coated
- Extruded Aluminium Heatsink
- Aluminium Anodized Reflector
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

Replace:


- 2x26W CFL Downlight &**
- Save Over 50% on Energy**

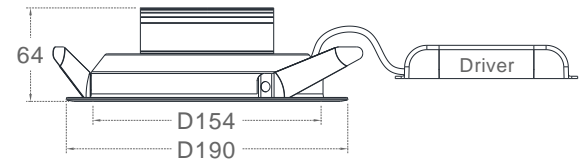

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Hole Cut (mm)
OS 705	2200lm	19W	0.08A	OS702-R-55-xxxxK-G2	VLD 25/500/50 or VLD 26-36/500 (T)	D170

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)		
OS702-R-55-xxxxK-G2 (SMD 2835 11C5B)	350mA	1955lm	11.5W	32V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	500mA	2640lm	16.5W	33V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

Photometric Data

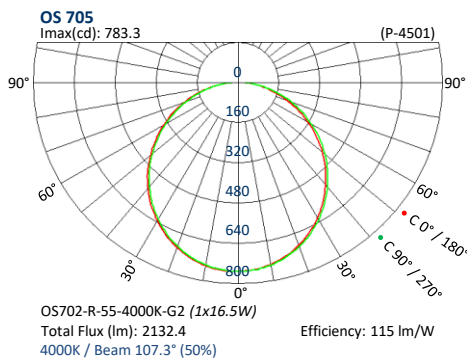

Flux Out: 596.0 lm

Height (M)	Lux	CM
1	569	115
2	142	231
3	63	346
4	36	462
5	23	577

Height Angle: 60° Diameter