

**OASIS 05 SERIES RECESSED ROUND LED DOWNLIGHT**

**MODEL: OS 805**

*Made to Order*



**Specifications & Technical Data**

**Luminaires:**


- Aluminium Alloy Rim & Housing
- Electrostatically Polyester Powder Coated
- Extruded Aluminium Heatsink
- Aluminium Anodized Reflector
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

**Areas of Application:**

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

**Replace:**


- 2x26W CFL Downlight &**
- Save Over 50% on Energy**

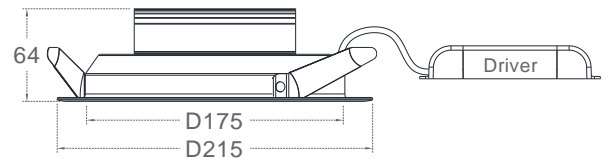

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Hole Cut (mm)
<b>OS 805</b>	<b>2200lm</b>	<b>19W</b>	0.08A	OS802-R-55-xxxxK-G2	VLD 25/500/50 <i>or</i> VLD 26-36/500 (T)	D190

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)		
<b>OS802-R-55-xxxxK-G2</b> (SMD 2835 11C5B)	<b>350mA</b>	<b>1955lm</b>	11.5W	32V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	<b>500mA</b>	<b>2640lm</b>	16.5W	33V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

**Photometric Data**

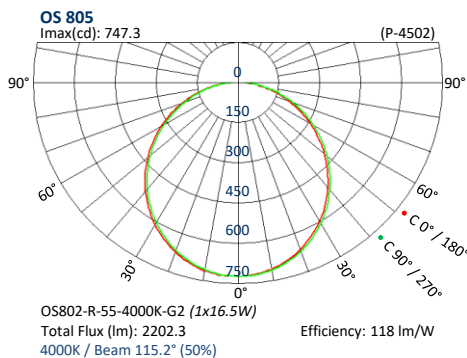

Flux Out: 581.8 lm

Height (M)	Lux	CM
1	556	115
2	139	231
3	62	346
4	35	462
5	22	577

Height      Angle: 60°      Diameter