

OASIS R 09 SERIES RECESSED ROUND LED DOWNLIGHT
MODEL: OS R609 (T)

Specifications & Technical Data
Luminaires:


- Die Cast Aluminium Rim & Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building


Replace:

**2x18W CFL Downlight &
Save Over 50% on Energy**

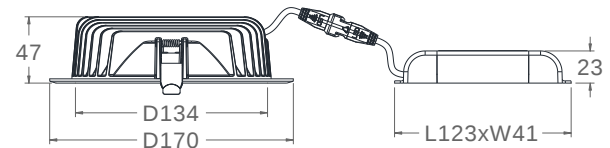

Model	System Lumens (lm)	System Power (W)	System Current (A)	Power Factor (λ)	THD	OS LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz)	Hole Cut (mm)
OS R609 (T)	1700lm	18W	0.08A	≥ 0.90	≤ 20%	OS LED 18W/xxxx	VLD 12-18/500 (T)	D155

OS LED Modules (DC)	Total Luminous Flux (lm) With Diffuser	Power (W)	CCT (K)	CRI (Ra)	Max. Temp. Range at ta (°C)	Lifespan (Hrs)
OS LED 18W/3000K	1700lm	18W	3000K	≥ 80	35°C	30000Hrs
OS LED 18W/4000K	1700lm	18W	4000K	≥ 80	35°C	30000Hrs
OS LED 18W/6000K	1700lm	18W	6000K	≥ 80	35°C	30000Hrs

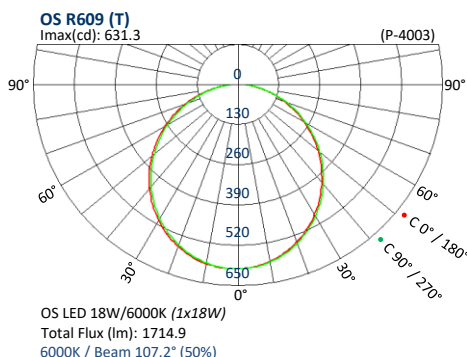Photometric Data


Flux Out: 480.4 lm

(M)	Lux	CM
1	459	115
2	115	231
3	51	346
4	29	462
5	18	577

Height Angle: 60° Diameter