

OASIS 16 SERIES SURFACE ROUND LED DOWNLIGHT
MODEL: OS 616/S (DC)

Specifications & Technical Data
Luminaires:

- Aluminium Housing & Mild Steel Base
- Electrostatically Polyester Powder Coated
- Polycarbonate **Opal** Diffuser
- Anodized Aluminium Reflector (*Frosted Facet*)
- Flex & Nylon Connecting Devices
- Surface / Suspension Ceiling Mounted

Areas of Application:


Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Optional:

-

Replace:

**1x26W CFL Downlight &
Save Over 50% on Energy**

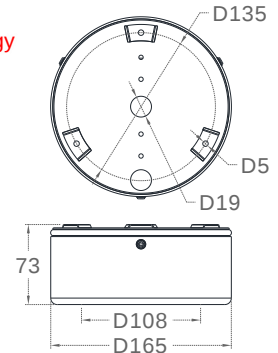

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.50)					
OS 616/S	1100lm	11W	0.09A	OS402-R-36-xxxxK-G2				VLD 10/250/40		

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS402-R-36-xxxxK-G2 (SMD 2835 12C3B)	250mA	1440lm	9W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	350mA	2000lm	12.5W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

Photometric Data
