

OASIS 23 SERIES RECESSED ROUND LED COB DOWNLIGHT
MODEL: OS 23 Series (10W)
Made to Order

OS 223-1

OS 223-2

OS 223-3

OS 223-4
Specifications & Technical Data
Luminaires:

- Die Cast Aluminium Rim & Housing
- Polycarbonate Dark Light Reflector (*DLR*)
- Polycarbonate Inner Reflector & Diffuser
- Electrostatically Polyester Powder Coated
- Separate Mild Steel Gear Box (GB-208) (*Optional*)
- Recessed Ceiling Mounted

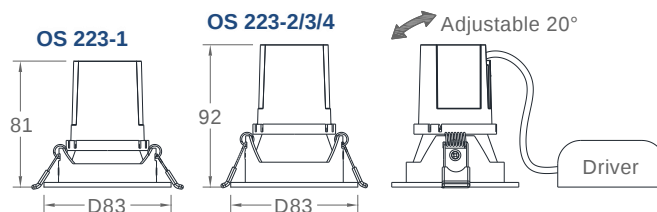
Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Shop Lighting, Public & Commercial Building

Replace:

1x50W Halogen Downlight
Save Over 80% on Energy


OS 223-1/V
(Vacuum DLR)

OS 223-1/W
(White DLR)


Model	System Lumens	System Power	System Current (A)	Beam Angle (°)	UGR	TRIDONIC Module SLE G7 ADV (DC)	TRIDONIC / VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Hole Cut (mm)
OS 223-1	900lm	10W	0.05A	24°	≤ 19	SLE G7 09mm 1200lm 8xx ADV	LC 10/250/42 fixC SC ADV2	D70
OS 223-2	400lm	10W	0.05A	17°			LC 10/150-250/42 flexC SC SNC4	
OS 223-3	500lm	10W	0.05A	20°			LC 10/150-250/42 flexC SC SNC4	
OS 223-4	430lm	10W	0.05A	22°			VLD 10/250/40 (30Khrs / 2 Years)	

TRIDONIC Module SLE G7 ADV (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Temp. at tp (°C)	Lifespan (Hrs) (L80/B50)
SLE G7 09mm 1200lm 830 ADV	250mA	1350lm	8.6W	34.5V	3000K	≥ 80	≤ 3	105°C	65°C	50000Hrs
SLE G7 09mm 1200lm 840 ADV	250mA	1430lm	8.6W	34.5V	4000K	≥ 80	≤ 3	105°C	65°C	50000Hrs