

OASIS 26 SERIES RECESSED ROUND LED DOWNLIGHT
MODEL: OS R426

Specifications & Technical Data
Luminaires:


- Mild Steel Rim
- Electrostatically Polyester Powder Coated
- **PS (Polystyrene) Opal** Diffuser
- Polycarbonate Gear Chamber
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted
- Built-In LED Driver

Areas of Application:


Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Replace:

**1x18W CFLi Downlight &
Save Over 50% on Energy**

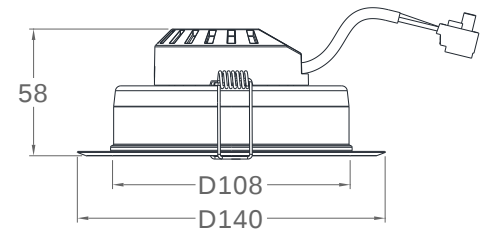

Model	System Lumens (lm)	System Power (W)	System Current (A)	Power Factor (λ)	CCT (K)			Lifespan (Hrs)	Hole Cut (mm)
OS R426	950lm	11W	0.085A	≥ 0.50	3000K	4000K	6000K	30000	D125

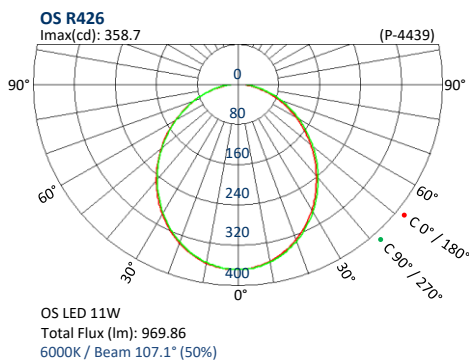Photometric Data


Flux Out: 272.9 lm

Height (M)	Lux	CM
1	261	115
2	65	231
3	29	346
4	16	462
5	10	577

Height Angle: 60° Diameter