


OASIS 26 SERIES RECESSED SQUARE LED DOWNLIGHT

MODEL: OS S426

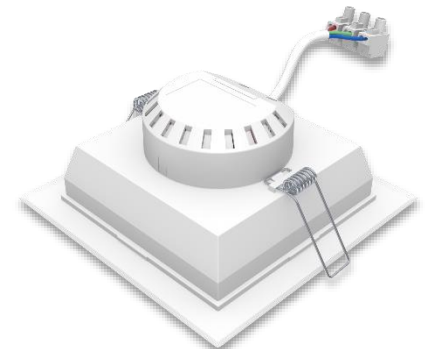

Specifications & Technical Data

Luminaires:


- Mild Steel Frame
- Electrostatically Polyester Powder Coated
- **PS (Polystyrene) Opal** Diffuser
- Polycarbonate Gear Chamber
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted
- Built-In LED Driver

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building


Replace:

**1x18W CFLi Downlight &
Save Over 50% on Energy**

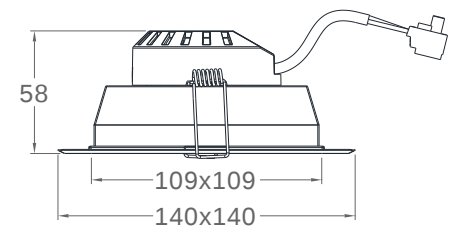

Model	System Lumens (lm)	System Power (W)	System Current (A)	Power Factor (λ)	CCT (K)			Lifespan (Hrs)	Hole Cut (mm)
OS S426	950lm	11W	0.085A	≥ 0.50	3000K	4000K	6000K	30000	123 ²

Photometric Data

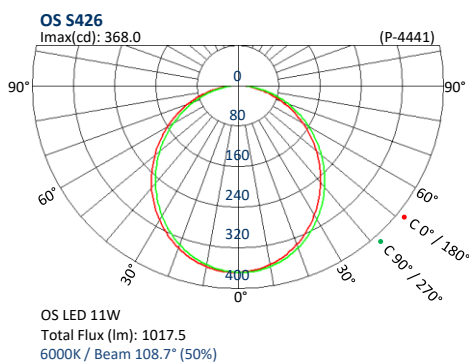

Flux Out: 280.9 lm

(M)	Lux	CM
1	268	115
2	67	231
3	30	346
4	17	462
5	11	577

Height Angle: 60° Diameter