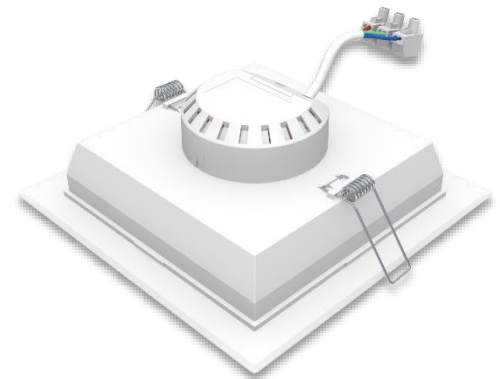


OASIS 26 SERIES RECESSED SQUARE LED DOWNLIGHT
MODEL: OS S626

Specifications & Technical Data
Luminaires:


- Mild Steel Frame
- Electrostatically Polyester Powder Coated
- **PS (Polystyrene) Opal** Diffuser
- Polycarbonate Gear Chamber
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted
- Built-In LED Driver

Areas of Application:


Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Replace:

**1x24W CFLi Downlight &
Save Over 50% on Energy**

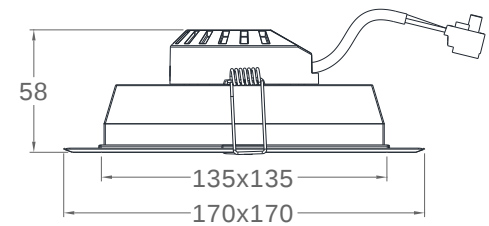

Model	System Lumens (lm)	System Power (W)	System Current (A)	Power Factor (λ)	CCT (K)			Lifespan (Hrs)	Hole Cut (mm)
OS S626	1150lm	13W	0.10A	≥ 0.50	3000K	4000K	6000K	30000	153 ²

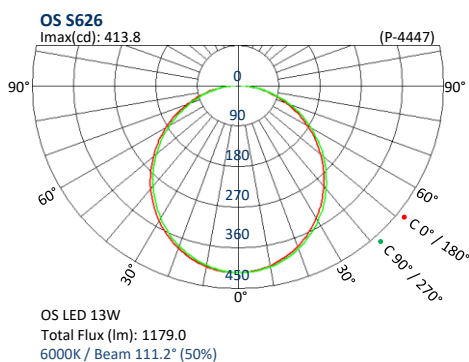Photometric Data


Flux Out: 318.3 lm

Height (M)	Lux	CM
1	304	115
2	76	231
3	34	346
4	19	462
5	12	577

Height Angle: 60° Diameter