
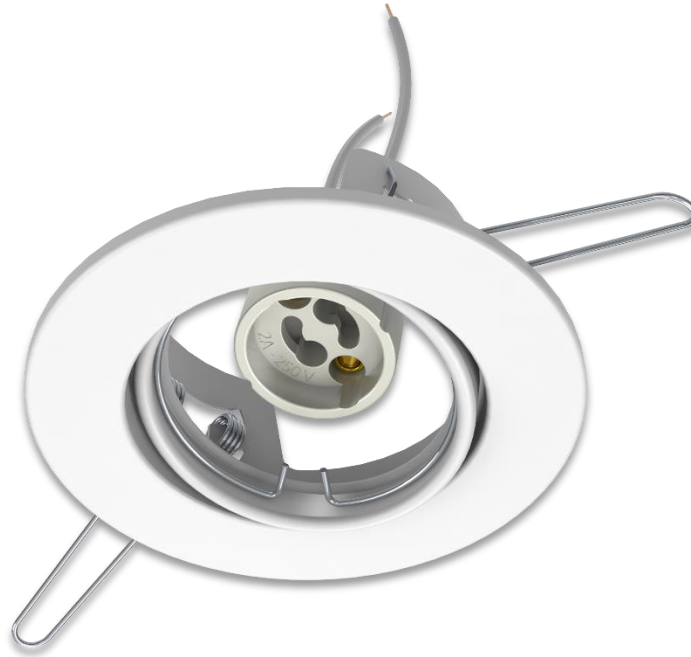


Adjustable LED Recessed Eyeball Downlight
Model: OS 701 (GU10)

Specifications & Technical Data

- Mild Steel Rim & Inner Ring
- Ceramic Lampholder (GU10)
- Adjustable Lamp Position
- Nylon Connecting Devices
- Stainless Steel Spring Clips
- Electrostatical Polyester Powder Coated
- Degree of Protection: **IP20**
- Mounting Method: Recessed Ceiling



Model	Luminaires				Dimension - mm		Current (A)	P.F. (λ)
	Rim & Ring	Lamp	Base	AC Input	D	H	± 5%	± 5%
OS 701	Mild Steel	1	GU10	220-240V, 50/60Hz	90	33	-	-

Brand	Code	Luminous Flux (lm)	Candela (cd)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
-------	------	--------------------	--------------	-----------	---------	----------	------	----------------	-----------	-------------	------------------	------------------	----------------

Photometric Data