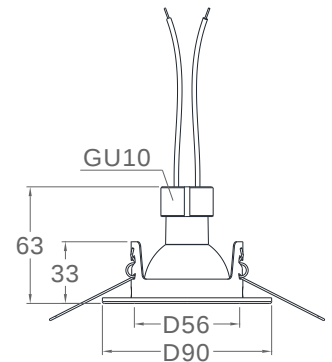


Adjustable LED Recessed Eyeball Downlight
Model: OS 701 (GU10)

Specifications & Technical Data

- Mild Steel Rim & Inner Ring
- Ceramic Lampholder (GU10)
- Adjustable Lamp Position
- Nylon Connecting Devices
- Stainless Steel Spring Clips
- Electrostatical Polyester Powder Coated
- Degree of Protection: **IP20**
- Mounting Method: Recessed Ceiling

Equivalent to Halogen PAR16 - 35W & 50W


Model	Luminaires				Dimension - mm		Current (A)	P.F. (λ)
	Rim & Ring	Lamp	Base	AC Input	D	H	± 5%	± 5%
OS 701	Mild Steel	1 x 5W	GU10	220-240V, 50/60Hz	90	63	0.04	> 0.50
		1 x 7.5W	GU10	220-240V, 50/60Hz	90	63	0.06	> 0.50

Brand	Code	Luminous Flux (lm)	Candela (cd)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED GU10 5W 3000K 36D (RLDM02K05304U1EX1)	450lm	610cd	5W	3000K	≥ 90	≤ 6	36°	GU10	0.04	> 0.5	220-240V, 50/60Hz	15000Hrs
Brand	Code	Luminous Flux (lm)	Candela (cd)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED GU10 7.5W 3000K 60D (RLDM02K08306U1EX1)	640lm	740cd	7.5W	3000K	≥ 90	≤ 6	60°	GU10	0.06	> 0.5	220-240V, 50/60Hz	15000Hrs

Date: 17 August 2024

Max. Operating Temperature at ta -20°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.