

OASIS D /OL REEDED DIFFUSER SERIES LED BATTEN FITTING
MODEL: OS D2-2/OL

IP20 For Housing
IP54 For LED
Specifications & Technical Data
Luminaires:

- Housing is Fabricated From Mild Steel (*70.5mm*)
- Stove-Coated With High Reflective White Epoxy
- Inner Base is Extruded From Aluminium
- Polycarbonate Reeded Diffuser (*Opal & Linear*)
- Polycarbonate White End Cap
- Nylon Connecting Devices
- Pre-Connected With PVC Cable
- Surface Ceiling / Wall Mounted or Suspension

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Optional:

VITALITE VECK 36LED
≥ 2 Hours Duration Emergency Powerpack

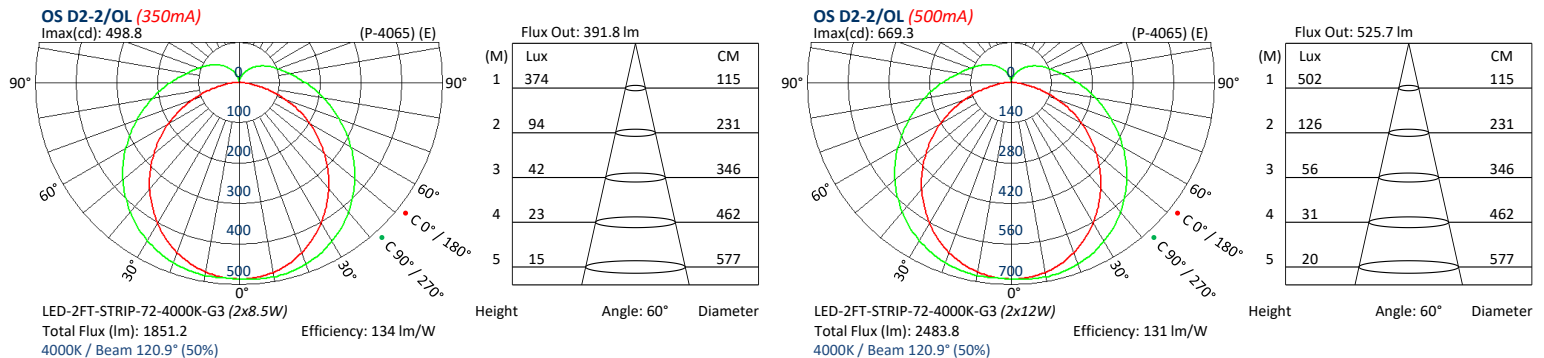
Equivalent:

Equiv. to **2x18W T8 FL**
Over **50% Energy Saving**



Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	LED Strip Module (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.5/0.9)	Dimension (mm)		
							L	W	H
OS D2-2/OL	1800lm	14W	0.12A	120°	2 x LED-2FT-STRIP-72-xxxxK-G3	1 x VLD 15/350/43 (PF 0.5)	600	81	66
	2500lm	19W	0.08A	120°	2 x LED-2FT-STRIP-72-xxxxK-G3	1 x VLD 25/500/50 (PF 0.9)	600	81	66

LED Strip Module (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
LED-2FT-STRIP-72-xxxxK-G3 <i>(SMD 2835 12C6B)</i>	250mA	1500lm	8.5W	33.5V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	350mA	2000lm	12W	34.5V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

Photometric Data


Date: 03 April 2024

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.