

**OASIS D /OL REEDED DIFFUSER SERIES LED BATTEN FITTING**
**MODEL: OS D4-2/OL**

**Specifications & Technical Data**
**Luminaires:**

- Housing is Fabricated From Mild Steel (T0.5mm)
- Stove-Coated With High Reflective White Epoxy
- Inner Base is Extruded From Aluminium
- Polycarbonate Reeded Diffuser (*Opal & Linear*)
- Polycarbonate White End Cap
- Nylon Connecting Devices
- Pre-Connected With PVC Cable
- Surface Ceiling / Wall Mounted or Suspension

**Areas of Application:**


Home, Hospitality, Hotels, Offices,  
Retail, Supermarkets, Restaurants,  
Public & Commercial Building

**Optional:**

VITALITE VECK 36LED  
≥ 2 Hours Duration Emergency Powerpack

**Equivalent:**

Equiv. to 2x36W T8 FL  
Over 50% Energy Saving

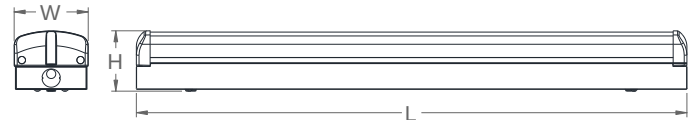

| Model      | System Lumens (lm) | System Power (W) | System Current (A) | Beam Angle (°) | LED Strip Module (DC)          | VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.90) | Dimension (mm) |    |    |
|------------|--------------------|------------------|--------------------|----------------|--------------------------------|-----------------------------------------------------|----------------|----|----|
|            |                    |                  |                    |                |                                |                                                     | L              | W  | H  |
| OS D4-2/OL | 2700lm             | 18W              | 0.08A              | 120°           | 2 x LED-4FT-STRIP-144-xxxxK-G3 | 1 x VLD 25/500/50                                   | 1160           | 81 | 66 |
|            | 3700lm             | 26W              | 0.12A              | 120°           | 2 x LED-4FT-STRIP-144-xxxxK-G3 | 1 x VLD 35/700/50                                   | 1160           | 81 | 66 |

| LED Strip Module (DC)                           | Current (mA) | Luminous Flux (lm) | Power (W) | Voltage (V) | CCT (K) |       |       | CRI (Ra) | SDCM | Max. Temp. at tc (°C) | Lifespan (Hrs) |
|-------------------------------------------------|--------------|--------------------|-----------|-------------|---------|-------|-------|----------|------|-----------------------|----------------|
| LED-4FT-STRIP-144-xxxxK-G3<br>(SMD 2835 12C12B) | 500mA        | 2880lm             | 17W       | 34V         | 3000K   | 4000K | 6500K | ≥ 80     | ≤ 5  | 85°C                  | 50000Hrs       |
|                                                 | 700mA        | 4000lm             | 25W       | 35V         | 3000K   | 4000K | 6500K | ≥ 80     | ≤ 5  | 85°C                  | 50000Hrs       |

**Photometric Data**
