

OASIS D /OL REEDED DIFFUSER SERIES LED BATTEN FITTING
MODEL: OS D4-2/OL


powered by

TRIDONIC
IP20 For Housing
IP54 For LED
Optional:

SSR - Suspension Rod

• SSR 305 (305mm / 12")

• SSR 460 (460mm / 18")

• SSR 610 (610mm / 24")

TRIDONIC LED Linear
Specifications & Technical Data
Luminaires:

- Housing is Fabricated From Mild Steel (*T0.5mm*)
- Stove-Coated With High Reflective White Epoxy
- Inner Base is Extruded From Aluminium
- Polycarbonate Reeded Diffuser (*Opal & Linear*)
- Polycarbonate White End Cap
- Nylon Connecting Devices
- Pre-Connected With PVC Cable
- Surface Ceiling / Wall Mounted or Suspension

Areas of Application:

 Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Optional:


VITALITE VECK 36LED

≥ 2 Hours Duration Emergency Powerpack

Equivalent:

4x36W T8 FL Diffuser Fitting

Over 50% Energy Saving

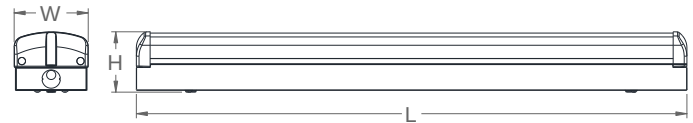

Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	TRIDONIC LED Linear Modules LLE Essence (DC)	TRIDONIC LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Dimension (mm)		
							L	W	H
OS D4-2/OL	6600lm	50W	0.22A	120°	4 x LLE 20x560mm 2400lm 8xx LV SNC3	1 x LC 50/200-350/170 flexCC Ip SNC3 (Dip-Switch Set to 350mA)	1160	81	66

TRIDONIC LED Linear Modules LLE Essence (DC)	Current (mA)	Luminous Flux (lm)			Power (W)	Voltage (V)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Temp. at tp (°C)	Lifespan (Hrs)
		3000K	4000K	6500K							
LLE 20x560mm 2400lm 8xx LV SNC3	350mA	1850lm	1950lm	1950lm	11.8W	33.7V	≥ 80	≤ 3	90°C	50°C	50000Hrs
	400mA	2100lm	2210lm	2210lm	13.5W	33.8V	≥ 80	≤ 3	90°C	50°C	50000Hrs
	450mA	2350lm	2460lm	2460lm	15.3W	34.0V	≥ 80	≤ 3	90°C	50°C	50000Hrs

Photometric Data
