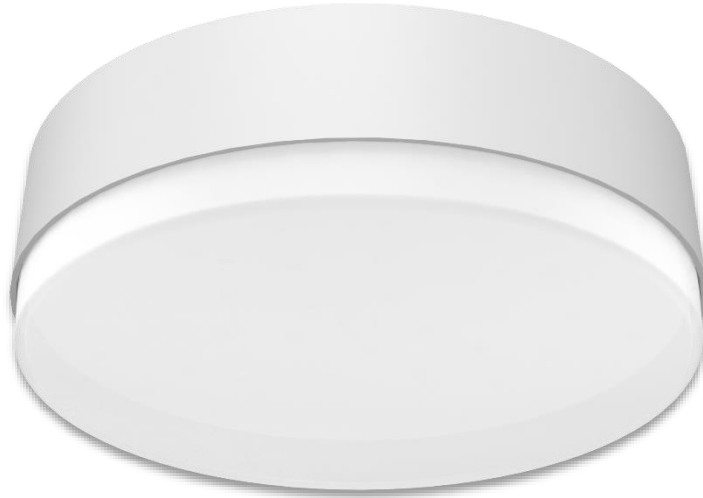


OASIS SR 04 SERIES SURFACE ROUND LED DOWNLIGHT
MODEL: OS SR 604

Specifications & Technical Data
Luminaires:


- Polycarbonate Surface Housing
- Polycarbonate Opal Diffuser
- Mild Steel Inner Plate
- Electrostatically Polyester Powder Coated
- Stainless Steel Spring Clip
- Flex & Nylon Connecting Devices
- Surface Ceiling Mounted

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building


Replace:

**2x18W CFL Downlight &
Save Over 50% on Energy**

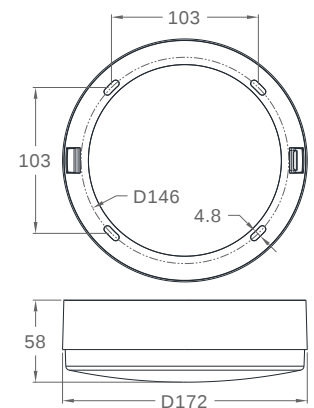

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220~240V, 50/60Hz, PF 0.50)
OS SR 604	1600lm	15W	0.12A	OS SR604-R-96-xxxxK-G1	VLD 15/350/43

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS SR604-R-96-xxxxK-G1 (SMD 2835 12C8B)	350mA	2000lm	12.6W	36V	3000K 4000K 6500K	≥ 80	≤ 5	85°C	50000Hrs

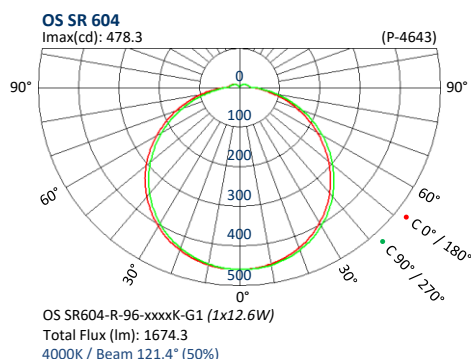Photometric Data


Flux Out: 376.6 lm

Height (M)	Lux	CM
1	360	115
2	90	231
3	40	346
4	22	462
5	14	577

Height Angle: 60° Diameter

Date: 08 March 2024

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.