

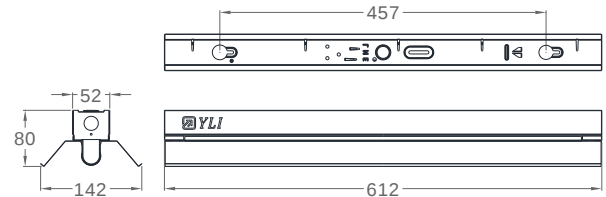
**T8 LED Bare Batten Fitting c/w Mirror Reflector**
**Model: OS YBC 1x600mm + MIR 120**

**Specifications & Technical Data**

- Housing is Fabricated From Mild Steel (*Thickness 0.5mm*)
- Anodized Aluminium Mirror Reflector (*Thickness 0.3mm*)
- Finished With Powder Electrostatically
- Stove-Coated With High Reflectivity White Epoxy
- Lampholder of Polycarbonate & Bronze
- Twist-Lock Lampholder For Reliable Contact
- Pre-Connected With 105°C HR PVC Wire
- Connecting Devices of Nylon 3 Way x 2.5mm<sup>2</sup>
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Surface Ceiling / Wall

**Optional:**

VITALITE VECK 18/T8 LED

**3** Hours Duration Emergency Powerpack


| Model                    | Luminaires  |        |            |                    |      | Dimension - mm |     |    |    | Current (A) | P.F. (λ) |
|--------------------------|-------------|--------|------------|--------------------|------|----------------|-----|----|----|-------------|----------|
|                          | No. of Lamp | Power  | Beam Angle | Reflector          | Base | L              | W1  | W2 | H  | ± 5 %       | >        |
| OS YBC 1x600mm + MIR 120 | 1           | 1 x 8W | 120°       | Anodized Aluminium | G13  | 612            | 142 | 52 | 80 | 0.035       | > 0.90   |

| Lamp (AC Input 100-240V, 50/60Hz, Athd < 15%) (2ft) |                                                       |        |      |             |           |         |          |      |         |       |                |
|-----------------------------------------------------|-------------------------------------------------------|--------|------|-------------|-----------|---------|----------|------|---------|-------|----------------|
| Brand                                               | Code                                                  | Type   | Base | Lumens (lm) | Power (W) | CCT (K) | CRI (Ra) | SDCM | Current | P.F.  | Lifespan (Hrs) |
| TOSHIBA                                             | T8 LEDtube PRO 600mm 8W 4000K<br>(RLDL0282C0840G1EX1) | T8 LED | G13  | 1100lm      | 8W        | 4000K   | ≥ 80Ra   | ≤ 6  | 0.035   | > 0.9 | 50000Hrs       |
| TOSHIBA                                             | T8 LEDtube PRO 600mm 8W 6500K<br>(RLDL0282C0865G1EX1) | T8 LED | G13  | 1100lm      | 8W        | 6500K   | ≥ 80Ra   | ≤ 6  | 0.035   | > 0.9 | 50000Hrs       |

**Photometric Data**