


T8 LED Bare Batten Fitting c/w Mirror Angle Reflector
Model: OS YBC 2x600mm + MIR 220A

Specifications & Technical Data

- Housing is Fabricated From Mild Steel (*Thickness 0.5mm*)
- Anodized Aluminium Mirror Angle Reflector (*Thickness 0.3mm*)
- Finished With Powder Electrostatically
- Stove-Coated With High Reflectivity White Epoxy
- Lampholder of Polycarbonate & Bronze
- Twist-Lock Lampholder For Reliable Contact
- Pre-Connected With 105°C HR PVC Wire
- Connecting Devices of Nylon 3 Way x 2.5mm²
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Surface Ceiling / Wall

Optional:

- VITALITE VECK 18/T8 LED
- 3 Hours Duration Emergency Powerpack

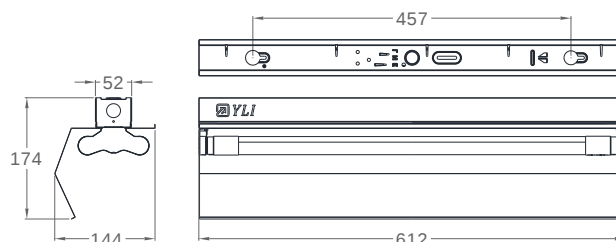

Model	Luminaires					Dimension - mm				Current (A)	P.F. (λ)
	No. of Lamp	Power	Beam Angle	Reflector	Base	L	W1	W2	H	± 5 %	>
OS YBC 2x600mm + MIR 220A	2	2 x 8W	130°	Anodized Aluminium	G13	612	144	52	174	0.07	> 0.90

Lamp (AC Input 100-240V, 50/60Hz, Athd < 15%) (2ft)											
Brand	Code	Type	Base	Lumens (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Current	P.F.	Lifespan (Hrs)
TOSHIBA	T8 LEDtube PRO 600mm 8W 4000K (RLDL0282C0840G1EX1)	T8 LED	G13	1100lm	8W	4000K	≥ 80Ra	≤ 6	0.035	> 0.9	50000Hrs
TOSHIBA	T8 LEDtube PRO 600mm 8W 6500K (RLDL0282C0865G1EX1)	T8 LED	G13	1100lm	8W	6500K	≥ 80Ra	≤ 6	0.035	> 0.9	50000Hrs

Photometric Data